

# LUBREX™

## *Auto Cleaning and Lubricating System*



LUBREX™

- Automatic cleaning, purging and lubricating system.
- Ergonomic front-loading, easy access design.
- Can be used for all high speed, low speed, air scaler, and air motor handpieces.
- Up to 4 handpieces can be processed simultaneously.
- Quick release air connector.
- Automatic fan and filter for vapor removal.
- Large reservoir capacity with visible oil level indicator.
- 450ml lubricant included and optional 1,000ml lubricant available for refill.
- Unit is available in 100V to 240V 50/60 Hz operation.

ISO 9001  
ISO 13485




GMP

**DENTAMERICA®**

# LUBREX™

## Auto Cleaning and Lubricating System

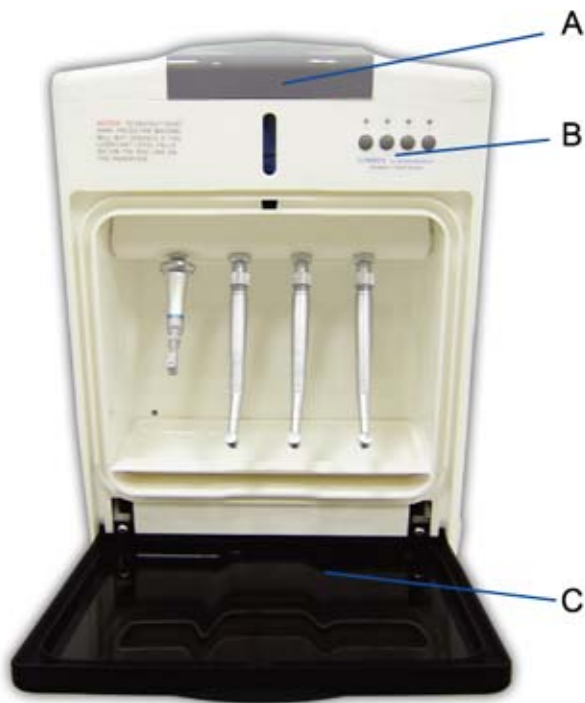

### SPECIFICATIONS

Dimensions	W330 x H430 x D430(mm)
Lubricant tank	300ml
Net Weight	13 kg
Air Pressure	7-10 bar
Main Voltage	100V to 240V
Frequency	50/60HZ
Fuse	1A
Connector types:	
Low-speed handpiece	E-type
High-speed handpiece	Midwest(4-hole) or Borden(2-hole)

### DENTAMERICA®

18688 E. San Jose Ave.  
City of Industry, CA 91748 U.S.A.  
Phone: (626) 912-1388  
Fax: (626) 913-0510  
www.dentamerica.com

#### A. Lubricant reservoir



The lubricant reservoir contains Lubrex brand lubricant made from natural mineral oil that is nontoxic, nonflammable, and nonallergenic.

#### B. Control Panel



The control panel allows for up to 4 handpieces (3 high speed + 1 low speed) to be processed together or individually for maximum efficiency.

#### C. Front Panel



Innovative design angles the handpiece connectors outward when the front panel is opened.

DISTRIBUTOR